




## All Fuses:

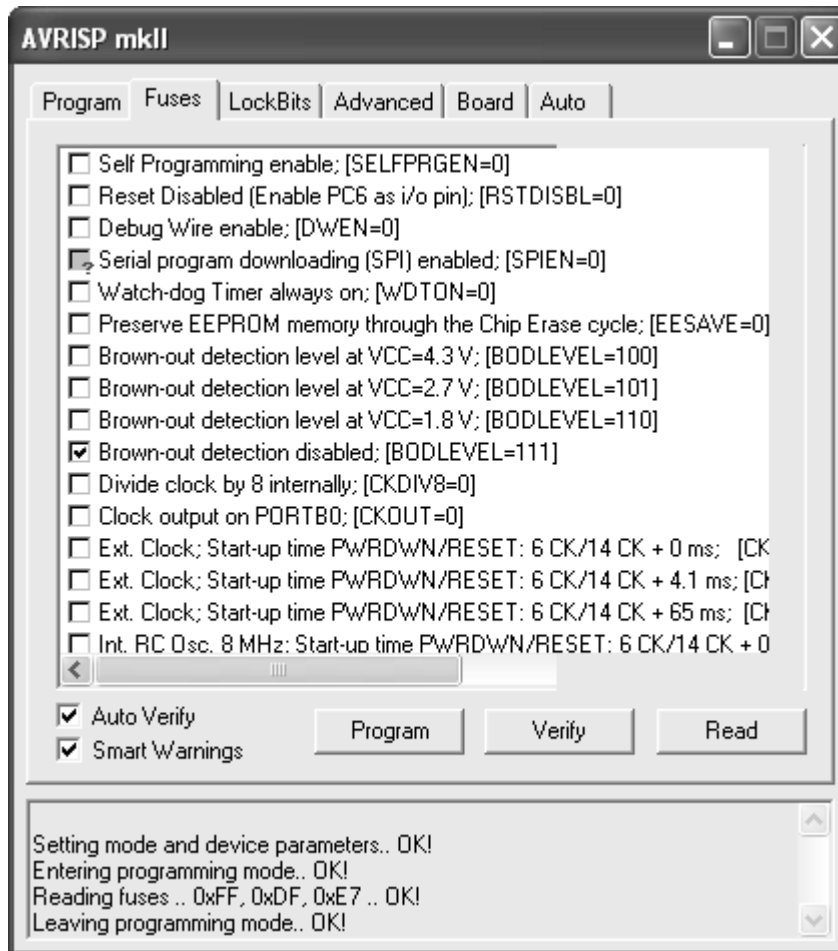

Set Clock to CKSEL=0111 SUT=10 -- this is a MUST!!!

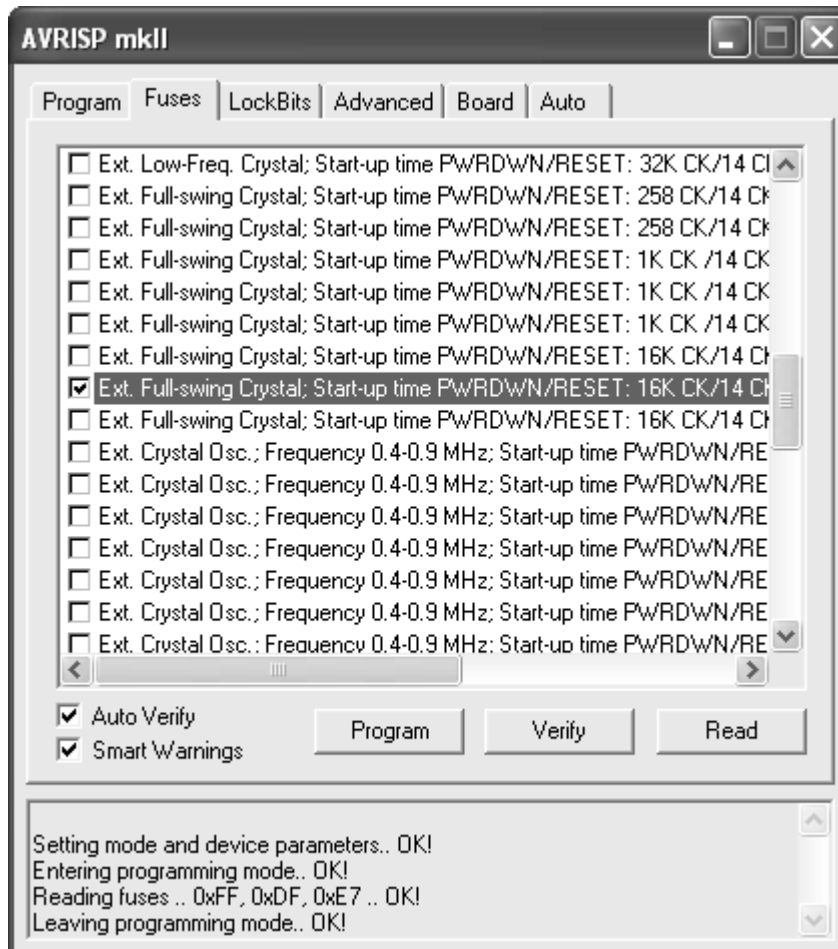

Device Clock by 8 internally MUST be disabled:

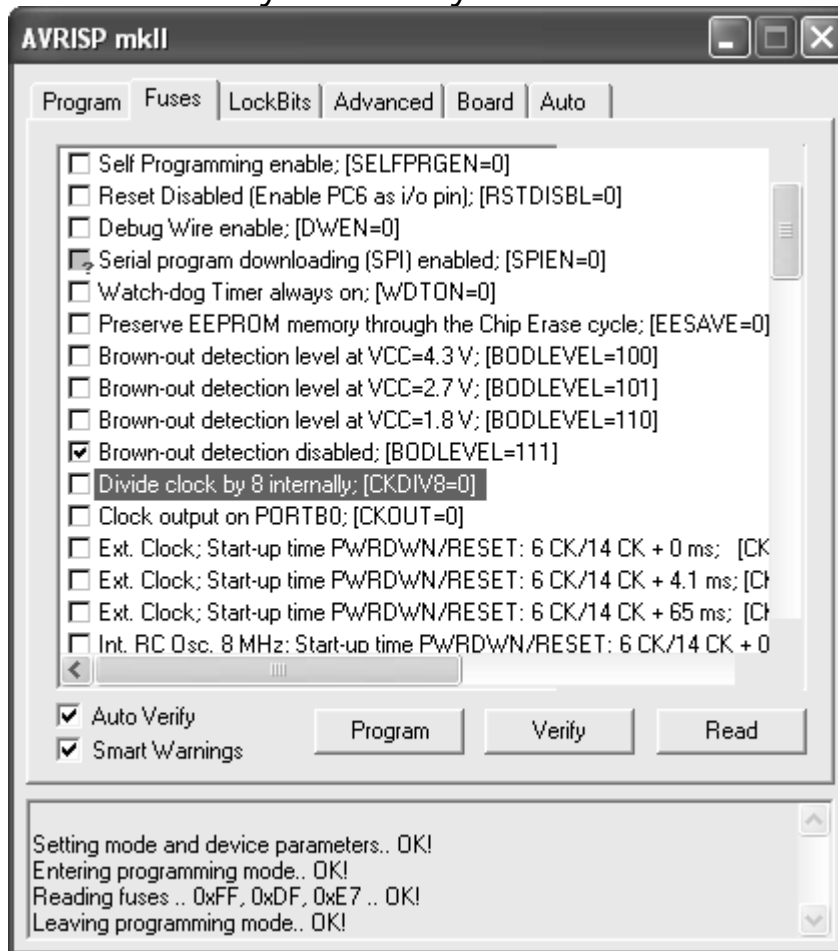

Programming was done using

